

TECHNICAL DATA SHEET

DESCRIPTION:	EMERGENCY & EXIT LED LIGHTING
CATEGORY:	EMERGENCY LIGHTING
REVISION DATE:	31 03 2021



PREMIUM QUALITY PRODUCTS:

Our range of emergency & exit lighting products are sourced from an Australian based specialized lighting company who have extensive experience in the electrical lighting wholesale industry.

The range makes use of high quality major components, rather than locally produced Chinese components. In particular, our main integrated circuits are sourced from US and European suppliers, while our LED's are high quality, long life Bridge Lux components sourced from the US.

Our plastic components are made from Polycarbonate (unlike other suppliers who use ABS plastics) resulting in much stronger and longer lasting components. Polycarbonate shells are also much more fire-resistant than ABS shells.

All our products use latest technology Lithium batteries produced by one of the world's largest battery manufacturers.

All lights have been certified by either Global Mark or SAI global as meeting AS/NZ 2293. In addition, all lighting complies with EMC requirements.

Our entire range of Emergency Exit Lighting comes with a 3 year warranty*



* 3 Year Warranty applies to all components other than the battery which has an industry benchmark 2 year warranty



AUSTRALIA WIDE FIRE SUPPLIES ABN 80393915621 UNIT 5/54 PENDLEBURY RD CARDIFF NSW 2285

P:(+61) 02 49540333 E: sales@awfs.com.au W: www.awfs.com.au

EMERGENCY EXIT LIGHT UNIVERSAL FIT PREMIUM LED

Part # ELE1610


Key Features:

- Quick fit bracket for fast ceiling and wall mount
- 50,000hr LED - Energy efficient & long life
- 3 hour runtime in emergency mode
- Low 3w standby power consumption
- Maintained
- Large terminal block for easy installation
- Easy testing & maintenance
- Designed and manufactured to AS/NZS2293.3
- Supplied with pictograph running-man and pictograph exit decals plus diffuser for single sided wall mounting
- 3 year warranty*



Dimensions:

LENGTH	WIDTH	HEIGHT
350mm	73mm	208mm

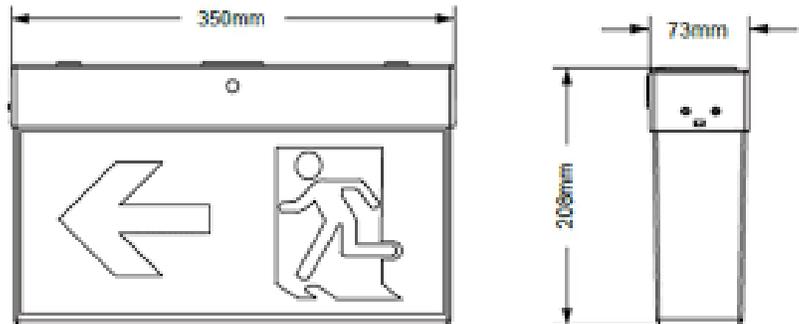

Specifications:

VOLTAGE	CLASSIFICATION	FREQUENCY	CHARGING TIME	DURATION	OPERATING TEMPERATURE	BATTERY CAPACITY
220-240	CO: D12.5 C90: D8	50/60	16 HOURS	3 HOURS	1 - 40°C	2200mAh

BATTERY TYPE	POWER	VIEWING	MODE	MOUNTING TYPE	IP RATING	BATTERY VOLTAGE
LITHIUM	3 WATTS	24m	MAINTAINED	WALL / CEILING	IP20	3.7V

* 3 Year Warranty applies to all components other than the battery which has an industry benchmark 2 year warranty



EMERGENCY DOWNLIGHT LED FLUSH FIT WHITE

Part # ELE6030

Key Features:

- 50,000hr LED - Energy efficient & long life
- 2 hour runtime in emergency mode
- Low 3w standby power consumption
- Maintained
- Easy testing & maintenance
- 1.2M flex and plug for easy install /replacement
- Designed and manufactured to AS/NZS2293.3
- 3 year warranty*



Dimensions:

DIAMETER	HEIGHT
140mm	17mm

Specifications:

VOLTAGE	CLASSIFICATION	FREQUENCY	CHARGING TIME	DURATION	OPERATING	BATTERY CAPACITY
220-240	D40	50/60	16 HOURS	2 HOURS	1 - 40°C	2200mAh

BATTERY TYPE	POWER	CUTOUT	MODE	MOUNTING TYPE	IP RATING	BATTERY VOLTAGE
LITHIUM	3 WATTS	85mm	MAINTAINED	CEILING	IP20	4.8V

* 3 Year Warranty applies to all components other than the battery which has an industry benchmark 2 year warranty



AUSTRALIA WIDE FIRE SUPPLIES ABN 80393915621 UNIT 5/54 PENDLEBURY RD CARDIFF NSW 2285

P:(+61) 02 49540333 E: sales@awfs.com.au W: www.awfs.com.au

EMERGENCY TWIN SPOTLIGHT LED

Part # ELE1704


Key Features:

- 50,000hr LED - Energy efficient & long life
- 3 hour runtime in emergency mode
- Low standby power consumption
- Non - Maintained
- Easy testing & maintenance
- 1.2M flex and plug for easy install /replacement
- Designed and manufactured to AS/NZS2293.3
- Wall mount IP65 Rated
- 3 year warranty*



Dimensions:

LENGTH	WIDTH	HEIGHT
273mm	68mm	290mm incl spots

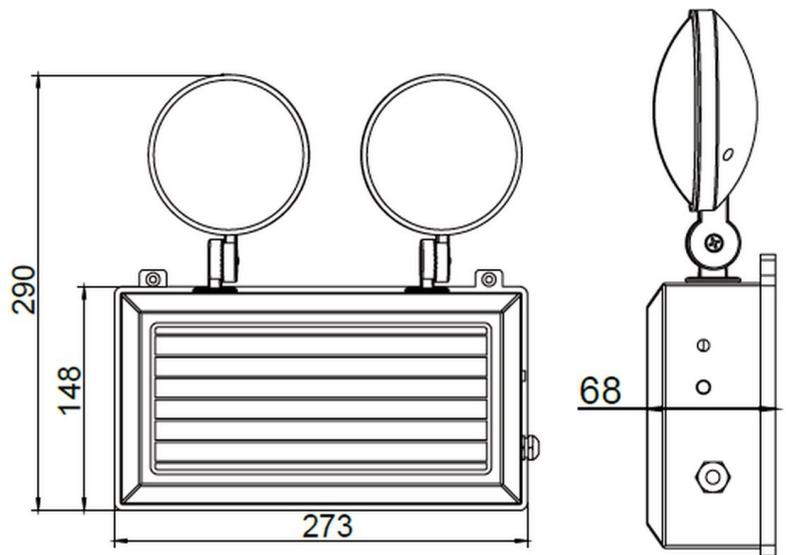

Specifications:

VOLTAGE	CLASSIFICATION	BATTERY TYPE	CHARGING TIME	DURATION	OPERATING TEMPERATURE	BATTERY CAPACITY	IP RATING
220-240	CO: D40	LITHIUM	16 HOURS	3 HOURS	1 - 40°C	2200mAh	IP65

* 3 Year Warranty applies to all components other than the battery which has an industry benchmark 2 year warranty

